

SPARTASHIELD[®]

Exterior 100% Acrylic Paints
Exceptional Durability and Versatility



THE #1 CHOICE OF
PAINTING PROFESSIONALS[®]

SPARTASHIELD® Exterior 100% Acrylic Paints that are Right for the Project

SPARTASHIELD® is a line of exterior 100% acrylic paints that is ultra-low VOC (volatile organic compounds). It is formulated to provide superior hide and durability combined with an exceptional balance of sag resistance and flow & leveling.

SPARTASHIELD is a line of durable, versatile products that is ideally suited for use on commercial and residential projects, such as schools, hotels, hospitals, and single family or multi-tenant housing.



All **SPARTASHIELD** products are easy to apply and dry to a smooth, uniform finish.



Why SPARTASHIELD® is the right product for the project

SPARTASHIELD® is a more durable, better hiding paint than the competition. The high quality resins and pigments used in our formula provide for a better hiding paint that is very easy to apply. This means that you will use less paint and get the job done faster.

SPARTASHIELD® is formulated to achieve a very good balance between sag resistance and flow & leveling. Special thickening agents are used that interact better with the resin particles to prevent excessive sag or running while providing very good flow & leveling when applied. You can achieve a smooth, uniform finish more quickly so the job looks great the first time.

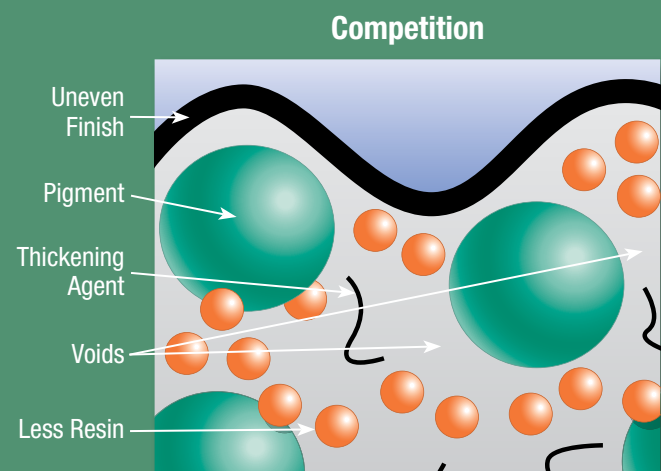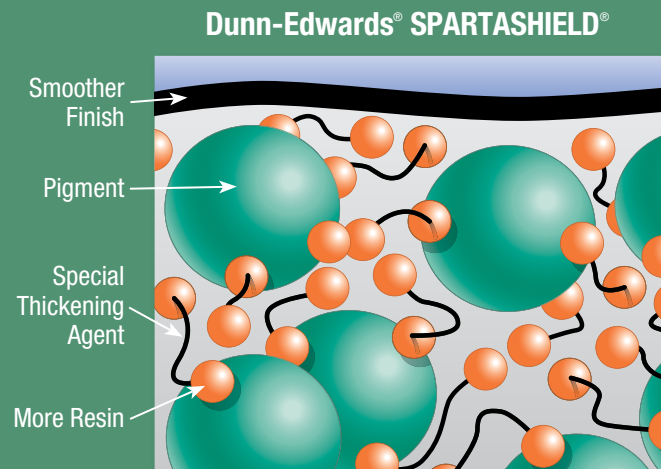

See the SPARTASHIELD® difference for yourself


Applied Hide Test

SPARTASHIELD® outperforms the competition in applied hide. Good applied hide ensures that maximum hide is achieved when the paint is rolled so that fewer coats are needed to complete the project.

SPARTASHIELD®
Exterior 100% Acrylic Flat Paint



National
Brand

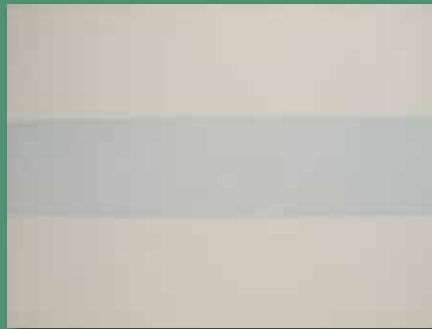

Regional
Brand



SPARTASHIELD®
Exterior 100% Acrylic Eggshell Paint



National
Brand



Regional
Brand



SPARTASHIELD®
Exterior 100% Acrylic Semi-Gloss Paint



National
Brand



Regional
Brand



Test Method: A 4 ft. by 4 ft. drywall board is primed with a white acrylic primer. After allowing the primer to dry for 6 hours, a 6 in. black stripe of acrylic flat black paint is applied across the board. After 24 hours, all paints are applied to the test boards by brush (on the edges) and roller (across the center). The completed test panel is visually assessed for how well the paint covers the black stripe, and for uniformity in appearance between the brushed and rolled areas.

Flow & Leveling Test

SPARTASHIELD® has better flow and leveling compared to competitive products of the same gloss level. Good flow and leveling ensures that the paint dries to a smooth uniform finish without any unsightly marks or lines.

SPARTASHIELD®
Exterior 100% Acrylic Eggshell Paint



National
Brand



Regional
Brand




SPARTASHIELD®
Exterior 100% Acrylic Semi-Gloss Paint



National
Brand



Regional
Brand

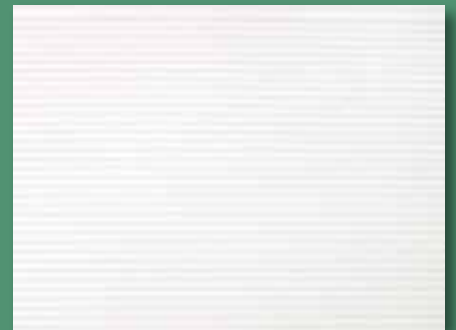

Test Method: Paints are applied to black and white charts using a special blade. After drying horizontally for 24 hours, the charts are examined to determine the smoothness of the finish against a standard Leneta scale from 1=Poor (not smooth) to 10=Excellent (completely smooth).

Efflorescence Test

SPARTASHIELD® Exterior 100% Acrylic Flat outperforms the competition in its ability to resist efflorescence, which are white salt deposits that can develop in masonry surfaces. Painted surfaces that resist efflorescence look newer longer.

SPARTASHIELD®
Exterior 100% Acrylic Flat Paint



National
Brand



Regional
Brand



Regional
Brand



Test Method: All paints are applied to cement fiber boards (equal measured amounts and allowed to dry for 24 hours). Cement boards are placed paint side down over a warm water bath (100–120°) for 48 hours. Boards are removed, allowed to dry at room temperature, and results are evaluated.

All test examples are high-resolution scans of the actual test results. The actual test results may be viewed by appointment at the Dunn-Edwards corporate office.

Recommended Primers

It is always recommended that **SPARTASHIELD®** be used over properly prepared and primed surfaces. Below is a list of recommended primers for use on each type of surface.

Masonry	Recommended Primer
Plaster, Tilt-Up Concrete, Poured-In-Place, Brick	EFF-STOP® Premium (ESPR00), EFF-STOP® Select (ESSL00 or FLEX-PRIME® Select (FPSL00)
Concrete Block	Medium BLOCFIL™ Premium (MBPR00), Smooth BLOCFIL™ Premium (SBPR00) or Smooth BLOCFIL™ Select (SBSL00)
Smooth Trowel	SUPER-LOC® Premium (SLPRA00/SLPRB00) or ENDURASEAL® (W360)

Wood	Recommended Primer
Trim, Sash, Fascia, Rough-sawn, T1-11 Siding	EZ-PRIME® Premium (EZPR00) or ULTRA-GRIP® Premium (UGPR00)

Synthetic Wood	Recommended Primer
Masonite, Hardboard, MDO Siding	ULTRA-GRIP® Premium (UGPR00)

Metal	Recommended Primer
Ferrous	BLOC-RUST® Premium (BRPR00), GALV-ALUM™ Premium (GAPR00) or ULTRA-GRIP® Premium (UGPR00)
Non-Ferrous	GALV-ALUM™ Premium (GAPR00), ULTRA-GRIP® Premium (UGPR00)

A green legacy, a greener future

Dunn-Edwards® has a green legacy that makes us proud and inspires us to do more.

We are firmly dedicated to the green principle of eco-efficiency, which we define as the ability to satisfy human needs in ways that minimize adverse impacts on energy and material resources, environmental quality, and human health and safety. **SPARTASHIELD®** is yet another example of this commitment.

SPARTASHIELD® is available in a full range of finishes and colors.



Exterior 100% Acrylic
Flat Paint
SSHL10



Exterior
Flat Paint
*SSHV10

*A vinyl-acrylic option that performs where you need it.



Exterior 100% Acrylic
Velvet Paint
SSHL20



Exterior 100% Acrylic
Eggshell Paint
SSHL30



Exterior 100% Acrylic
Low Sheen Paint
SSHL40



Exterior 100% Acrylic
Semi-Gloss Paint
SSHL50



Exterior 100% Acrylic
Gloss Paint
SSHL60

DUNN-EDWARDS CORPORATION
4885 East 52nd Place
Los Angeles, California 90058-5507
(888) DE PAINT | dunnedwards.com



Like us on Facebook
facebook.com/dunnedwards



THE #1 CHOICE OF
PAINTING PROFESSIONALS®



Mixed Sources
Product groups from well-managed
forests, controlled sources and
recycled wood or fiber

Cert no. SCS-COC-001825
www.fsc.org
© 1996 Forest Stewardship Council

©2011 Dunn-Edwards Corporation. All rights reserved. Dunn-Edwards®, The #1 Choice of Painting Professionals®, BLOCFIL™, BLOC-RUST™, EFF-STOP®, ENDURASEAL®, EZ-PRIME®, GALV-ALUM™, SPARTASHIELD®, SUPER-LOC®, ULTRA-GRIP®, and WB SYN-LUSTRO® are registered and/or trademarks of the Dunn-Edwards Corporation. GALV-ALUM™ is a trademark of BIEC International, Inc. used under license by Dunn-Edwards Corporation. ESL1006 · 15M 6/11